BRUHAT BANGALORE MAHANAGARA PALIKE

YELAHANKA ZONE

Name of work: Estimate for Providing CC Road and Drains at Srirampura in Ward No.05, Byatarayanapura Sub Division

			Estimate Cost Rs.						2000000.00
Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
1	KSRB 2-1.1: Earth work in surface excavation in ordinary soil for leveling and lowering the ground manually (other than foundation of buildings, culverts, road drains and trenches of pipe line and cables) and removing the excavated stuff to a distance not exceeding 50m and lift upto 1.5m, excavated surface leveled and neatly dressed, disposed earth to be leveled after breaking of clods and neatly dressed as per specifications, Specification No KBS 2.1(a) / 2.3.1,P. No. 5/ Item No. 2.1/ PWD SR 2013-14	cum							
	Gingarappa layout 1st Cross		1	110.00	5.75	0.20	126.50		
	3rd Cross		1	110.00	6.00	0.20	132.00		
	Desilting of Drains								
	Gingarappa layout 1st Cross		2	110.00	0.40	0.30	26.40		
	3rd Cross		2	110.00	0.40	0.35	30.80		
							315.70	126.36	**39892.00**
	Basic Rate	117.00							
	Area Weightage @ 8%	9.36							
	Total	**126.36**							
2	Removing B.S Slab of Drain and stacking Page No. 28/ Item No. 5.32/ PWD SR 20113-14	Sqm							
	Gingarappa layout 1st Cross		2	110.00	1.40		308.00		
	3rd Cross		2	110.00	1.40		308.00		
							616.00		
	Deduct 10% Missing Slabs						61.60		
							554.40	50.11	**27782.00**
	Basic Rate	46.40							
	Area Weightage @ 8%	3.71							
	Total	**50.11**							
3	Refixing stone slabs of drains and pointing in C.M (1:3) Page No. 28/ Item No. 5.33/ PWD SR 2013-14	Sqm							
			Qty Vide Item No.3				554.40		
							554.40	70.04	**38829.00**
	Basic Rate	64.85							
	Area Weightage @ 8%	5.19							
	Total	**70.04**							
4	Providing granite slabs of selected quality roughly dressed and fixed in cement mortar(1:6) including fixing curing etc, complete -do- 7.5 cms thick Page No. 28/ Item No. 5.31.1/ PWD SR 2013-14	**Sqm**							
	For Missing slabs (10%)		Missing Slabs				61.60		
							61.60	343.44	**21156.00**
	Basic Rate	318.00							
	Area Weightage @ 8%	25.44							
	Total	**343.44**							

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
5	KSRB-4-1.3 : Providing and laying in position **plain cement concrete of mix M 7.5** withOPC cement at 180kgs, with 40mm and down size graded granite metal coarse aggregates @0.892cum and fine aggregates @0.57cum machine mixed, concrete laid in layers not, exceeding 15cms, thick, well compacted, in foundation and plinth, including cost of all materials, labour, HOM of machinery, curing complete as per specifications. Specification No. KBS 4.1,4.2, No. 12/ Item No. 4.3/ PWD SR 2013-14	**Cum**							
	Gingarappa layout 1st Cross		1	110.00	5.75	0.15	94.88		
	3rd Cross		1	110.00	6.00	0.15	99.00		
							193.88	4290.84	**831887.00**
	Basic Rate	3973.00							
	Area Weightage @ 8%	317.84							
	Total	**4290.84**							
6	KSRB 4-6.7 : Providing and removing centering, shuttering, strutting, propping etc., and removal of form work for sides and soffits of beams, beam haunchings, cantilever girders, bressumers and lintels not exceeding 1 m in depth including cost of all materials, labour complete as per specifications. Specification NO KBS 4.6.2 Page No. 17/ Item No. 4.34/ PWD SR 2013-14	**Sqm**							
	Gingarappa layout 1st Cross		2	110.00		0.10	22.00		
	3rd Cross		2	110.00		0.10	22.00		
							44.00	**244.08**	**10740.00**
	Basic Rate	226.00							
	Area Weightage @ 8%	18.08							
	Total	**244.08**							
7	Providing and laying cement concrete using 20mm and down size granite jelly of ready mixed concrete (RMC)for R.C.C works laid in 15cms thick layers and well compacted vibrating, curing, finishing with necessary cement mortar, form works and scaffoldings to withstand pumping of concrete, with all lead and lifts etc., complete (exclusive of cost of steel and fabrication charges.) Ready mixed Cement concrete M-20 for raft foundation, column footing, main and secondary beams. Page No. 19/ Item No. 4.48.1/ PWD SR 2013-14	Cum							
	Gingarappa layout 1st Cross		1	110.00	5.80	0.10	63.80		
	3rd Cross		1	110.00	6.00	0.10	66.00		
							129.80	6464.88	**839141.00**
	Basic Rate	5986.00							
	Area Weightage @ 8%	478.88							
	Total	**6464.88**							

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
8	KSRRB M2600-3: (ii) Providing & fixing 20 m thick compressible fibre board in expansion joint complete as per drawing & technical specification complete as per specifications, MORTH specification No. 2605, No. 248/ Item No. 31.3 PWD SR 2013-14	M							
	Gingarappa layout 1st Cross		18	6.00			108.00		
	3rd Cross		18	6.00			108.00		
							216.00	137.16	29627.00
	Basic Rate	127.00							
	Area Weightage @ 8%	10.16							
	Total	137.16							
9	Vaccum De- writing with vaccum pump and suction mat and compaction with skin flater clubbed with floatiog disc including cost of generator, HOM of machinery Sereed Vibratory Power Floaterblade and diisc etc. with all lead and lift No. 187/ Item No. 22.7/ PWD SR 2013-14	Sqm							
	Gingarappa layout 1st Cross		1	110.00	5.75		632.50		
	3rd Cross		1	110.00	6.00		660.00		
							1292.50	91.80	118652.00
	Basic Rate	85.00							
	Area Weightage @ 8%	6.80							
	Total	91.80							
10	Lead for Disposal of Debris shall be payable at carage rates by Mechanical means inlcuding loading and unloading. From 0.00 to 2.00 Km (Page No.123,	Cum							
				Qty. Vide Item No. 1			315.70		
	Average Weight of Earth 1.28 Ton/Cum						315.70	62.20	19637.00
	Basic Rate Lead Charges Upto 2.00 Kms	5.12							
	PWD SR 2010-11 (P.118/I.17.1) For loading and unloading	62.20							
	Total	67.32							
11	For 1% Third Party Charges								20000.00
12	Miscesallaneous Charges	L/S							2657
								Total	2000000.00

(Rupees Twenty Lakhs Only)

Certificate:

1 The work spot has been inspected and the work is found necessary.
2 This estimate is prepared as per PWD SR of 2012-13
3 The provisions were made in this estimate are necessary and adequate.
4 This works come under B.B.M.P. limits.

Assistant Engineer
ಸಹಾಯಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ. ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ

Assistant Executive Engineer
Bruhat Bangalore Mahanagara Palike
Byatarayanapura Sub Division

Executive Engineer
Bruhat Bangalore Mahanagara Palike
Byatarayanapura Division

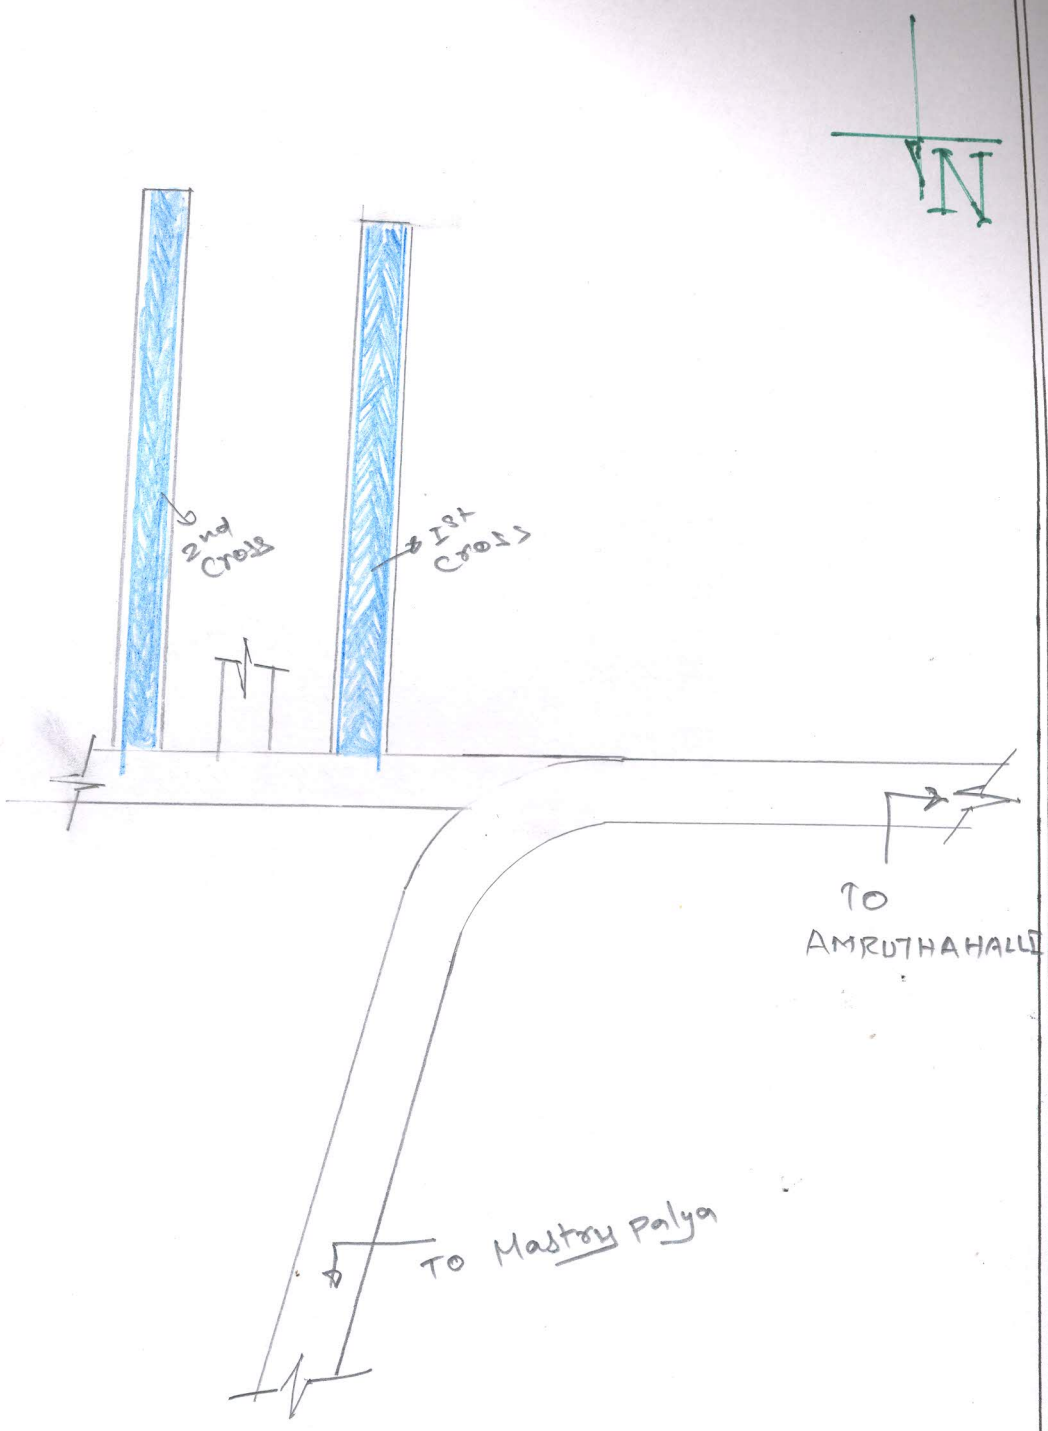

ಸಹಾಯಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ. ಬ್ಯಾಟರಾಯನಪುರ ಉಪ ವಿಭಾಗ

Assistant Executive Engineer
Byatarayanapura Sub Division
B.B.M.P. Bangalore-24